



**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:

Richard Geiss et al.

For : METHOD AND APPARATUS FOR CONNECTING BROADBAND  
VOICE AND DATA SIGNALS TO TELEPHONE SYSTEMS

Our File No. : 10868-US

April 24, 2001

Director of the United States  
Patent and Trademark Office  
Washington, D.C. 20231  
U. S. A.


**TRANSMITTAL LETTER**

Sir:

In connection with the above-captioned application, please find enclosed for filing:

- Certified Copy of Priority Document

Respectfully submitted,

  
George M. MacGregor, Reg. No. 37,547  
Marks & Clerk  
P.O. Box 957, Station B  
280 Slater Street, Suite 1800  
Ottawa, Ontario, Canada  
K1P 5S7

Telephone No.: (613) 236.9561  
Facsimile No.: (613) 230-8821

RECEIVED  
APR 30 2001  
O.I.P.E./JCWS

**This Page Blank (uspto)**



**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of:

Richard Geiss et al.

For : METHOD AND APPARATUS FOR CONNECTING BROADBAND  
VOICE AND DATA SIGNALS TO TELEPHONE SYSTEMS

Our File No. : 10868-US

April 24, 2001

Director of the United States  
Patent & Trademark Office  
Washington, D.C. 20231  
U.S.A.

**ATTENTION: BOX MISSING PARTS**

Sir:

With regard to the above-noted application, Applicant submits herewith the  
certified copy of the priority document.

Respectfully submitted,

George M. MacGregor, Reg. No. 37,547  
Marks & Clerk  
P.O. Box 957, Station B  
280 Slater Street, Suite 1800  
Ottawa, Ontario, Canada  
K1P 5S7  
Telephone No.: (613) 236-9561  
Facsimile No.: (613) 230-8821

This Page Blank (uspto)



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name in which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 29 March 2001

**This Page Blank (uspto)**

Patents Form 1/77

Patents 1977

25 APR 2000

26APR00 E532148-16 D03312  
F01/7700 0.00-0010075.0**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

RL.P51147GB

2. Patent application number

(The Patent Office will fill in this part)

0010075.0

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Mitel Corporation  
P.O. Box 13089  
350 Legget Drive  
Kanata, Ontario  
Canada  
K2K 2W7

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

CANADA

607630006

4. Title of the invention

METHOD AND APPARATUS FOR CONNECTING  
BROADBAND VOICE AND DATA SIGNALS TO  
TELEPHONE SYSTEMS

5. Name of your agent (*if you have one*)

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(*including the postcode*)

Marks &amp; Clerk

Marks & Clerk  
4220 Nash Court  
Oxford Business Park South  
Oxford  
OX4 2RU

Patents ADP number (*if you know it*)

727 1125 001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

Yes

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form (none)

Description 7

Claim(s) 4

Abstract 1

Drawing(s) 1 only

10. If you are also filing any of the following, state how many against each item.

Priority documents (none)

Translations of priority documents (none)

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) (none)

Any other documents (please specify) (none)

11. I/We request the grant of a patent on the basis of this application.

Signature *Marks & Clerk*  
Marks & Clerk

Date  
25 April 2000

12. Name and daytime telephone number of person to contact in the United Kingdom Dr. Robert Lind 01865 397900

#### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

#### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.



## METHOD AND APPARATUS FOR CONNECTING BROADBAND VOICE AND DATA SIGNALS TO TELEPHONE SYSTEMS

### Field of the Invention

This invention relates to telecommunications and more particularly to systems and methods for use in connecting broadband voice and data signals to telephone networks.

### Background

The increasing use of the Internet and other computer based communications systems has lead to the development of systems and methods for providing higher bandwidth access over existing telephone lines. A conventional access loop from the Central Office (CO), for example, employs a twisted copper pair and transmission systems implementing technologies such as Digital Subscriber Line (DSL) have been developed to carry both voice and broadband data signal over such access loops.

Due to the low pass filtering characteristics of a standard twisted pair telephone wire, the amplitude of a received signal is attenuated more for higher frequency signals than for lower frequency signals. As a result, the received high frequency data signal is smaller in amplitude than the low frequency voice signal. In a system which contains both voice and data on the same twisted pair wire, most of the dynamic range of the signal is used by the larger (i.e. less attenuated ) voice signal. Typical interface systems incorporate a circuit to separate the data band and the voice band signals directly at the line connection point and use duplicate circuitry for each separate signal band. For example, US patent 6,035,029 which issued March 7, 2000 to Little et al describes a system in which a network interface unit at the customer premise separates the Plain Old Telephone Signal (POTS) from the data signal and each is processed separately. Circuits of this type typically contain an expensive transformer and the duplication of components in general adds to the system cost and power requirements.

Since the voice and data signals in such systems are full duplex (i.e. both transmit and receive at the same time on the same twisted pair wire), a fraction of the transmitted

signals from both the voice and data bands appears across the connection points to the twisted pair. The connection point is also known as the Tip and Ring. These unwanted signals must be removed for proper signal reception. This is typically done in a voice only system using an analog circuit which subtracts the appropriate fraction of the outgoing (fraction transmit) signal from the incoming (receive + fraction transmit) signal. The resulting signal is the receive signal alone. This is known as a transhybrid loss circuit.

In a voice only system, since the transmit fraction of the incoming signal is in the same amplitude range as the receive component of the incoming signal, the transhybrid loss circuit function can be performed digitally after the analog to digital conversion without much compromise on the dynamic range of the analog to digital converter. This can be a large problem in a system which has a high frequency data signal, since the transmit fraction of the incoming signal is much larger than the receive component of the incoming signal.

#### Summary of the Invention

The present invention seeks to provide an interface system for connecting broadband voice and data signals to a transmission medium such as a twisted pair for bi-directional communication without the voice band signals significantly affecting the data band signals and visa versa.

The invention is suitable for, but not limited to, interfacing a DSL analog front end circuit to a subscriber line in the presence of a voice band (DC - 4000hz) signal.

Therefore in accordance with a first aspect of the present invention there is provided: a method of terminating an interface to a connection point in a communication system for communicating voice and data band signals over a common communications medium comprising: providing an analog filter in a voice band return loss circuit to prevent voice band interference on the data band signal.

In accordance with a second aspect of the invention there is provided: a method of terminating an interface to a connection point in a communication system for

communicating voice and data band signals over a common communications medium comprising: providing an analog filter in a data band return loss circuit to prevent data band interference on the voice band signal.

5 In a further aspect there is provided: a method of terminating an interface to a connection point in a communication system for communicating voice and data band signals over a common communications medium comprising: providing a first analog filter in a voice band return loss circuit to prevent voice band interference on the data band signal and providing a second analog filter in a data band return loss circuit to prevent data band interference on the voice band signal.

10 Still further, there is provided: a method of canceling a transhybrid component and near end echo from a data signal at an interface to a communication system for bi-directional communication of voice and data band signals over a common interface comprising: providing an analog circuit for removing the transhybrid component and near end echo from an incoming signal; and providing an analog data band filter for preventing data band interference on the voice band signal.

15 Further still, there is provided: a termination circuit for a subscriber line interface connected to a transmission medium for bi-directional communication of both voice and data signals, said termination circuit comprising; detection means to detect voice and data signals at a connection point to said transmission medium; a voice band return loss means monitoring said voice and data signals and generating a voice band return signal to be forwarded to said connection point, said return signal being a representation of said voice band signal; and a voice band filter connected to said return loss means said voice band filter isolating said voice band return loss signal from said data band signal.

20 Also, there is provided: a termination circuit for a subscriber line interface connected to a transmission medium for bi-directional communication of both voice and data signals, said termination circuit comprising; detection means to detect voice and data signals at a connection point to said transmission medium; a data band return loss means monitoring said voice and data signals and generating a data band return signal to be forwarded to said connection point, said data band return signal being a representation of

said data band signal; and a data band filter connected to said return loss means said data band filter isolating said data band return loss signal from said voice band signal.

A termination circuit having both voice and data return loss circuits having voice band and data band filters respectively is also contemplated by the invention.

### Brief Description of the Drawings

The invention will now be described in greater detail with reference to the attached drawing wherein Figure 1 is a block circuit diagram of the invention.

### Description of the Invention

Figure 1 is a block diagram illustrating at a high level the various circuits and components making up the invention. A line termination exists wherever something connects to a twisted pair wire. Any signal transmitted along the twisted pair wire would have a fraction of its signal reflected back to the source. This is known as a far end echo. The amount of the reflected signal is dependent on how closely the termination impedance matches the line impedance. Since a twisted pair of wire looks like different impedances for different frequencies, any termination circuit that is optimized for high frequency applications will not be optimized for voice band and vice versa. A physical termination suitable for both bands is generally not possible. A method of making a physical termination look like it has a termination impedance different than the physical impedance is to have a fraction of the signal received at the termination modified by a return loss circuit 114 and transmitted back out on the line. This modulates the line driver output impedance to make physical termination look different than without the modulation.

Typically devices used for data will have a means of canceling the resulting far end echo which is reflected back to them, but most voice band equipment does not have any means of canceling echo reflected back to it. Therefore, anyone planning to do voice transmission must match the line impedance better than someone doing just data transmission who could ignore how much far end echo they generate.

The problem is that the return loss circuitry 114 used to match a line for voice

characteristics can actually interfere with the higher frequency data signal. In order to provide a good termination for the voice band without significantly affecting the data band signal, the invention uses a voice band filter 113 to isolate the effects of the modulation to the voice band. Similarly the return loss circuit 117 for the data band is limited to only affecting the data band by the data band filter 116.

Since systems requiring the presence of both voice and data over the same twisted pair wire are required to produce only small far end echo in the voice band, a circuit is required to reduce the voice band far end echo generated. Since this requirement may degrade the data band signal performance, the invention incorporates a voice band filter 113 to minimize the impact on the data band signal. This ability to provide a circuit which reduces far end echo in the voice band but has little impact on the data band signal allows for good voice band performance as well as a simpler data band receive circuit.

Since any bi-directional transmission along a twisted pair wire contains both the transmit and receive signals, a fraction of the outgoing signal across the outputs of 103 and 104 will appear across Tip 131 and Ring 132. This is referred to as the transhybrid component. Also any mismatch in the line termination on the transmit connection to the line and the actual line will result in a fraction of the outgoing signal being reflected back and added to the incoming signal. That fraction is called the near end echo.

For voice band signals, the transmit and receive signals are approximately the same amplitude range. Therefore, the incoming signal made up of the receive signal plus the near end echo plus the transhybrid component will not be much larger than the receive signal amplitude alone. Therefore, the resolution of the analog to digital converter required to digitize the voice signal with near end echo and transhybrid component does not have to be much better than that required for the voice signal alone. The invention could perform near end echo cancellation and transhybrid component cancellation with either an analog circuit or a digital circuit after digitization. Therefore, for voice band signals this is generally not a problem.

Since the transmit signal, across the outputs of 103 and 104, for data frequency band is quite large compared with its data band receive signal across Tip 131 and Ring

132, any transhybrid component or near end echo from its transmit signal may also be much larger than its receive signal especially for long wire lengths. If an analog to digital converter is eventually required to digitize the data band receive signal, the dynamic range of the analog to digital converter will have to allow for the receive data band signal as well as the near end echo and transhybrid loss. This requires the resolution of the analog to digital converter to be much better than that required for the data band receive signal alone.

A typical solution would be to digitize the signal, using a high resolution analog to digital converter, and cancel the near end echo and transhybrid component in the digital domain. The invention uses an analog circuit 118 to perform the transhybrid component estimation and near end echo estimation and subtracts them from the incoming signal to produce a new signal which is close to just the receive signal alone. The invention uses a data band filter 119 to limit the effects of the estimations to the data frequency band. This reduces the transhybrid component and near end echo to a point where the resolution of the analog to digital converter required to digitize the incoming data band signal does not require much more resolution than that required to digitize the data band receive signal alone.

Analog to digital converters for the frequency range of the data band become very difficult to manufacture and are also very expensive for high resolution, therefore by reducing the resolution requirements of the analog to digital converter, the invention reduces overall system cost and improves manufacturability.

For any system required to deal with both voice and data over the same twisted pair wire, there will be both voice band and data band components on the incoming signal. Since the characteristics of the line produce a low pass filtering effect, the higher frequency data band signal is attenuated more than the lower frequency voice band signal. This results in the voice band receive signal having a larger amplitude than the data band receive signal.

Therefore, for a system required to receive both voice and data signals, an analog to digital converter with a resolution much better than that required if only the data band

receive signal was presented to the analog to digital converter is required, due to the difference in the relative amplitudes of the voice band signal and the data band signal. This is a typical method in a system using both voice and data on the same twisted pair wire.

5 One way of avoiding a very high resolution analog to digital converter is to use analog filters 125 and 126 to allow for the voice band and the data band respectively to be separated. This allows for the voice band and the data band to be digitized by two separate lower resolution analog to digital converters. Since the voice band analog to digital converters are less expensive than the wide band analog to digital converters for the data band, the combined cost of a voice band analog to digital converter and a low resolution data band analog to digital converter will be less than the cost of an analog to digital converter with high enough resolution to digitize a signal containing both voice band and data band components.

10 A second way of avoiding a very high resolution analog to digital converter is to have the outputs of the filters 125 and 126 independently scaled and summed. This would provide a single output signal consisting of both the voice band and data band, but with the voice band and data band scaled such that they have approximately the same relative amplitudes. This allows for a single analog to digital converter to be used to digitized the voice band and the data band but without requiring the analog to digital converter to have a resolution much higher than that required for digitizing the data band signal alone.

15 A third way of avoiding a very high resolution analog to digital converter is by independently scaling and summing the voice band and data band signals of a system requiring both voice and data over the same twisted pair wire.

20 While particular embodiments of the invention have been described and illustrated it will be apparent to one skilled in the art that that numerous variations can be made to these embodiments without departing significantly from the basic concept. It is to be understood, however, that such variations will be seen to fall within the full scope of the invention as defined by the appended claims.

**Claims**

1. A termination circuit for a subscriber line interface connected to a transmission medium for bi-directional communication of both voice and data signals, said termination circuit comprising:

detection means to detect voice and data signals at a connection point to said transmission medium;

a voice band return loss means monitoring said voice and data signals and generating a voice band return signal to be forwarded to said connection point, said return signal being a representation of said voice band signal; and

a voice band filter connected to said return loss means said voice band filter isolating said voice band return loss signal from said data band signal.

2. A termination circuit for a subscriber line interface connected to a transmission medium for bi-directional communication of both voice and data signals, said termination circuit comprising:

detection means to detect voice and data signals at a connection point to said transmission medium;

a data band return loss means monitoring said voice and data signals and generating a data band return signal to be forwarded to said connection point, said data band return signal being a representation of said data band signal; and

a data band filter connected to said return loss means said data band filter isolating said data band return loss signal from said voice band signal.

3. A termination circuit for a subscriber line interface connected to a transmission medium for bi-directional communication of both voice and data signals, said termination circuit comprising:

detection means to detect voice and data signals at a connection point to said transmission medium;

a voice band return loss means monitoring said voice and data signals and



generating a voice band return signal to be forwarded to said connection point, said return signal being a representation of said voice band signal;

a data band return loss means monitoring said voice and data signals and generating a data band return signal to be forwarded to said connection point, said data band return signal being a representation of said data band signal;

a voice band filter connected to said return loss means said voice band filter isolating said voice band return loss signal from said data band signal; and

a data band filter connected to said return loss data band means, said data band filter isolating said data band return loss signal from said voice band signal.

4. A termination circuit as defined in claims 1, 2 or 3 wherein said communications medium is a twisted copper pair.

5. A termination circuit as defined in claims 1, 2, 3 or 4 wherein said bi-directional communication is implemented utilizing a Digital Subscriber Line (DSL) scheme.

6. A system for canceling a transhybrid component and a near end echo from a data band signal at an communication system interface for bi-directional communication of voice and data band signals over a common communication medium, said circuit comprising:

an analog circuit to estimate said transhybrid component value and said near end echo value and to subtract said estimated values from an incoming data signal; and

an analog data band filter to restrict the estimation to said data band signal.

7. A system as defined in claim 6 having an analog to digital converter for digitizing said incoming data signal after said transhybrid component and near end echo have been canceled.

8. A system as defined in claim 7 having a voice band filter and a data band filter to receive said incoming signal, and to separate said incoming signal into separate voice band and data band signals for processing by separate analog to digital converters.

9. A system as defined in claim 7 having scaling means to receive said incoming signal and to independently scale said voice band signal and said data band signal and to add the scaled signals prior to processing by said analog to digital converter.

10. A system as defined in claim 7 having a voice band filter and a data band filter to receive said incoming signal, and to separate said incoming signal into separate voice band and data band signals, scaling means to scale each of said separated voice and data signals, and means to add said scaled voice and data band signals into a combined signal prior to processing by said analog to digital converter.

11. A method of terminating an interface to a connection point in a communication system for communicating voice and data band signals over a common communications medium comprising: providing an analog filter in a voice band return loss circuit to prevent voice band interference on the data band signal.

12. A method of terminating an interface to a connection point in a communication system for communicating voice and data band signals over a common communications medium comprising: providing an analog filter in a data band return loss circuit to prevent data band interference on the voice band signal.

13. A method of terminating an interface to a connection point in a communication system for communicating voice and data band signals over a common communications medium comprising: providing a first analog filter in a voice band return loss circuit to prevent voice band interference on the data band signal and providing a second analog filter in a data band return loss circuit to prevent data band interference on the voice band signal.

14. A method of canceling a transhybrid component and near end echo from a data signal at an interface to a communication system for bi-directional communication of voice and data band signals over a common interface comprising: providing an analog circuit for removing said transhybrid component and near end echo from an incoming signal; and providing an analog data band filter for preventing data band interference on the voice band signal.

15. The method of claim 14 further comprising the step of providing an analog to digital converter for digitizing said voice and data band signals.

16. The method of claim 15 wherein said incoming signal after cancellation of transhybrid components and near end echo is separated into voice band and data band signals utilizing a voice band filter and a data band filter respectively and digitized by separate analog to digital converters.

17. The method of claim 15 wherein said incoming signal after cancellation of transhybrid components and near end echo is separated into voice band and data band signals, scaled as separate signals, added together to form a composite signal and digitized in an analog to digital converter.

18. The method of claim 15 wherein said incoming signal after cancellation of transhybrid components and near end echo is separated into voice band and data band signals utilizing a voice band filter and a data band filter respectively, said separate signals being scaled and added together as a scaled composite signal and digitized by an analog to digital converter.

19. A system substantially as herein described with reference to Figure 1 of the accompanying drawings.

### Abstract

A system for use in connecting broadband voice and data signals to communications systems such as the telephone system. Due to the low pass filtering characteristics of a standard twisted pair used in conventional telephone access loops data band signals are attenuated more than voice band signals. The present invention provides apparatus and methods for interfacing data and voice band signals to a common communications medium, such as a twisted pair, while significantly reducing the influence of one frequency band on the other.

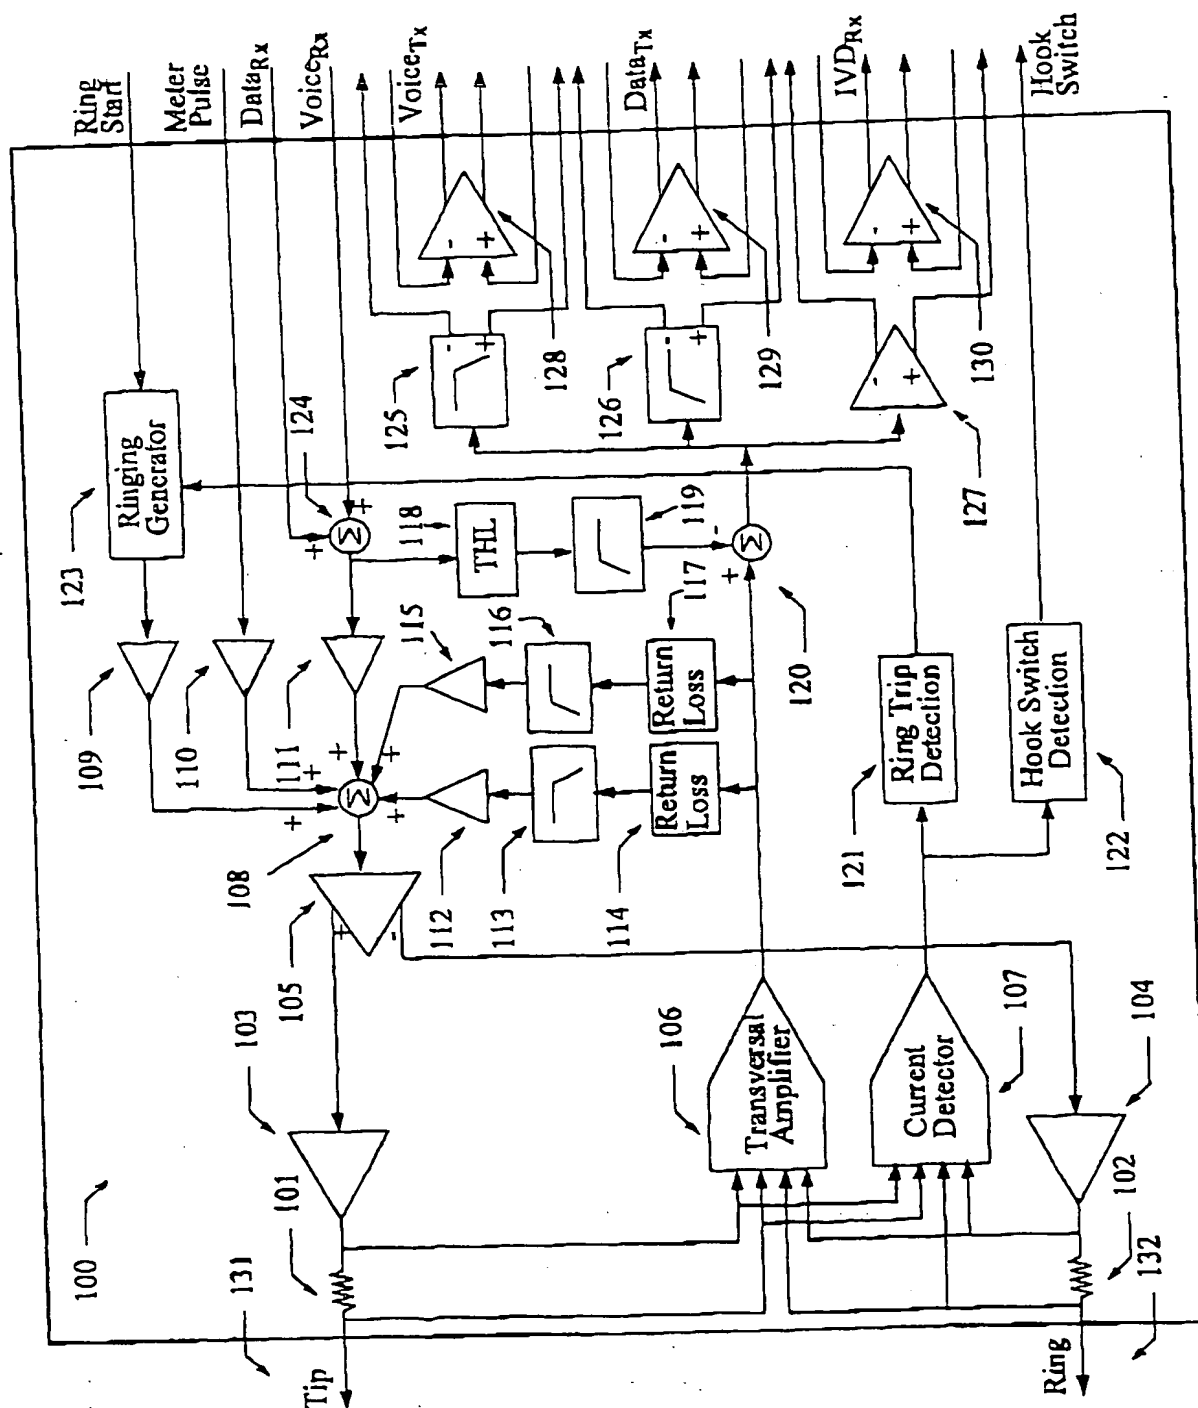


FIGURE 1. Block Diagram of Invention - Universal SLIC

This Page Blank (uspto)